

AMBIENT TEMPERATURE	40°C	WINDING DATA		
TEMPERATURE RISE	H	Winding code		M0
INSULATION CLASS	H	Number of leads		12
POWER FACTOR	0,8	Winding pitch		2/3
FREQUENCY	Hz	50		60
VOLTAGE	Star series Star parallel	V	380 400 415 440 190 200 208 220	380 416 440 460 480 190 208 220 230 240
RATING	kVA kW	63,0 65,0 63,0 60,0 50,4 52,0 50,4 48,0	65,0 70,4 74,5 77,9 81,3 52,0 56,3 59,6 62,3 65,0	
EFFICIENCY (%) @ 0,8 p.f.	4/4 3/4 2/4	89,9 90,0 90,2 90,1 91,1 91,2 91,2 90,8 91,8 91,9 91,4 90,7	89,7 90,3 90,6 90,7 90,8 91,0 91,4 91,6 91,8 91,8 91,8 92,1 92,2 92,3 92,3	
EFFICIENCY (%) @ 1,0 p.f.	4/4 3/4 2/4	92,5 92,7 92,9 93,1 93,4 93,7 93,6 93,5 94,0 94,3 93,7 93,2	92,1 92,6 92,9 93,1 93,3 93,2 93,6 93,8 93,9 94,1 93,9 94,2 94,3 94,4 94,4	
STAND-BY RATING (163/27)	kVA	69,3 71,5 69,3 66,0	71,5 77,4 82,0 85,7 89,4	
STAND-BY EFFICIENCY (%) @ 0,8 p.f.		89,4 89,5 89,8 89,8	89,2 89,8 90,1 90,3 90,4	
SHORT CIRCUIT RATIO (referred to class H rating)		0,36 0,39 0,43 0,51	0,29 0,32 0,34 0,36 0,37	
REACTANCES (%) (referred to class H rating)				
Direct axis synchronous	x _d	307 286 258 218	381 344 325 311 298	
Quadrature axis synchronous	x _q	139 129 116 99	172 155 147 140 135	
Direct axis transient	x' _d	16,6 15,5 13,9 11,8	20,6 18,6 17,6 16,8 16,1	
Direct axis subtransient	x'' _d	11,9 11,1 10,0 8,4	14,7 13,3 12,6 12,0 11,5	
Quadrature axis subtransient	x'' _q	13,1 12,2 11,0 9,3	16,2 14,6 13,8 13,2 12,7	
Negative sequence	x ₂	12,5 11,6 10,5 8,9	15,4 14,0 13,2 12,6 12,1	
Zero sequence	x ₀	8,9 8,3 7,4 6,3	11,0 9,9 9,4 9,0 8,6	

TIME CONSTANTS [s]

Open circuit (T' _{do})	0,704	Subtransient (T'' _d)	0,010
Transient (T' _d)	0,065	Armature (T _a)	0,013

MECHANICAL CHARACTERISTICS

D-end bearing/Lubrication	Available on double bearing configuration (on request)
N-end bearing/Lubrication	6207 2RS C3 / Prelubricated
Weight [kg]	234
Inertia (J) [kgm ²]	0,40
Overspeed [min ⁻¹]	2250
Method of cooling	IC 01
Cooling air required [m ³ /s] @ 50/60 Hz	0,13 / 0,15
Degree of protection	IP 23
Type of construction available	B2 (B34 on request)
Direction of rotation	CW

OTHER DATA

Phase resistance [Ω] @ 20 °C - Star series	0,084
Overloads	10% for 1 hour
3-phase short circuit current	>= 300% (3 I _n) with aux. winding or PMG
Voltage regulation accuracy	+/- 0,5 % (@ rated load, balanced and non-distorting, p.f. 0,8)
Radio interference	EN 55011 Class B Group 1
Wave form THF	< 2%
Total harmonic content	< 2% (at no load)


STANDARDS

IEC 60034-1; BS 4999-5000; NEMA MG 1.32.
--


Typical efficiency curves

50 Hz - 1500 min⁻¹


380 V

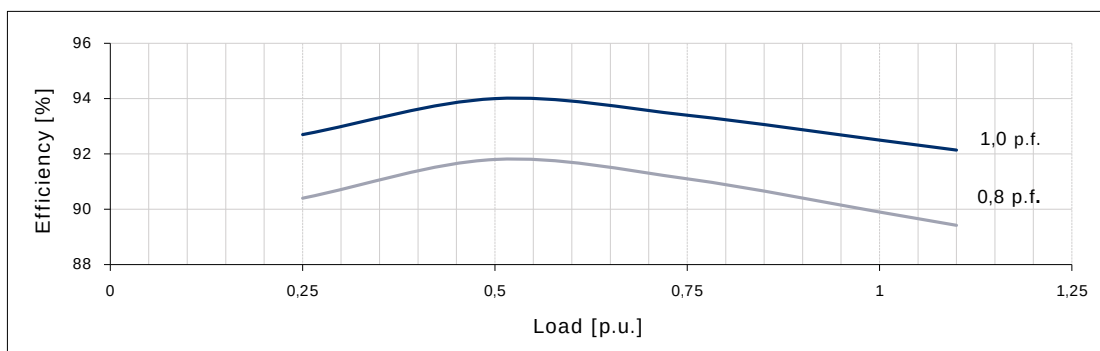


400 V

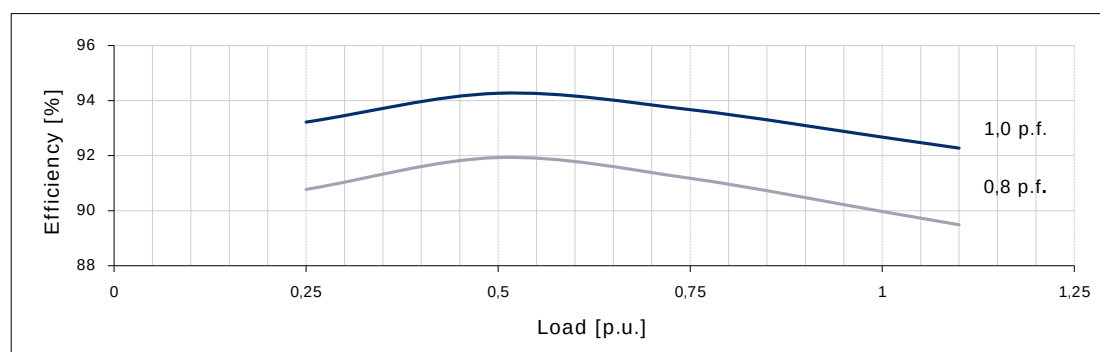

415 V

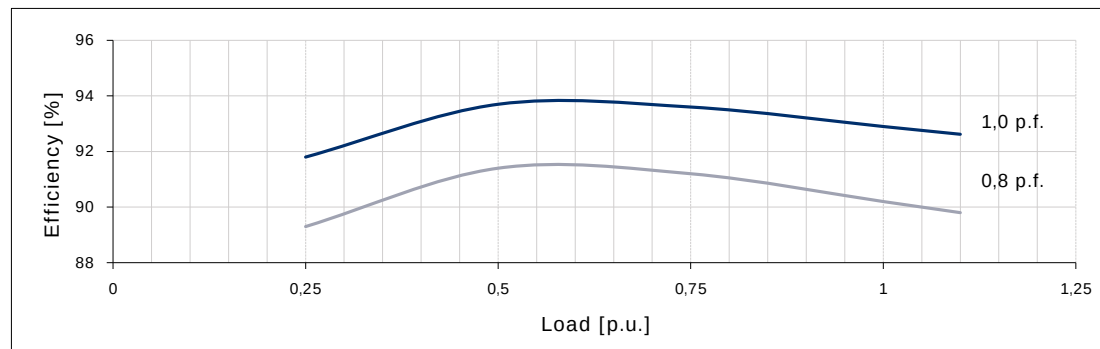


440 V

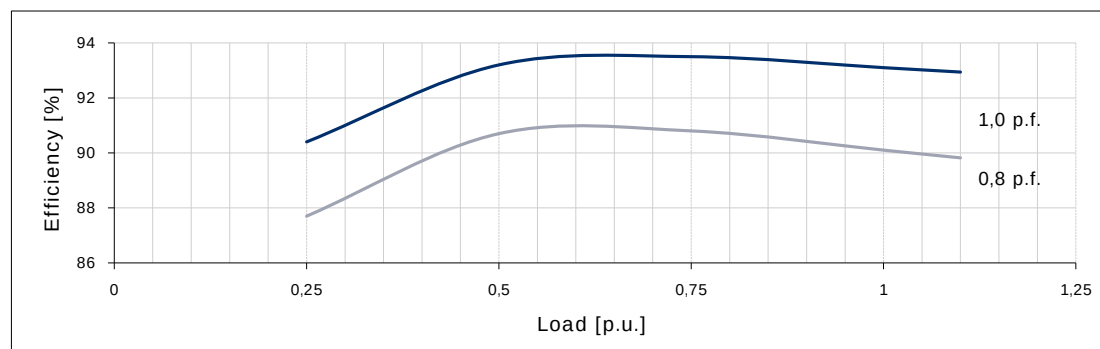


Typical efficiency curves

60 Hz - 1800 min⁻¹


380 V

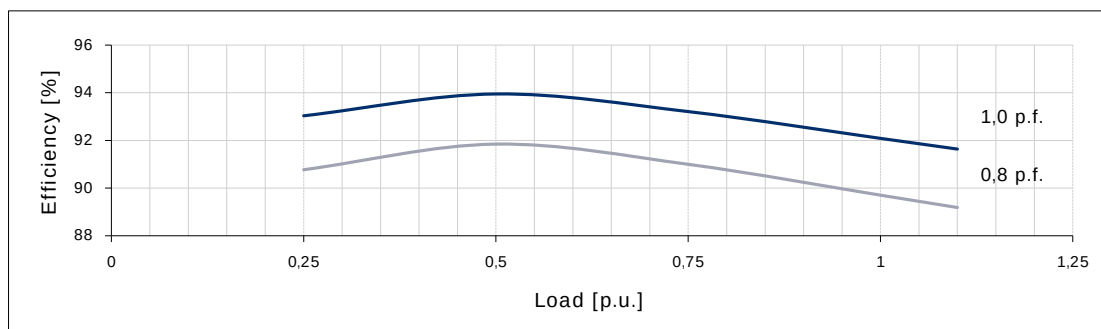


416 V

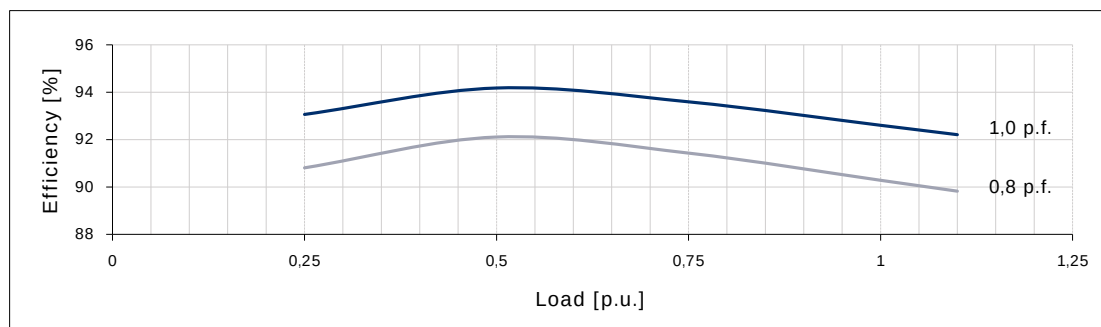


440 V

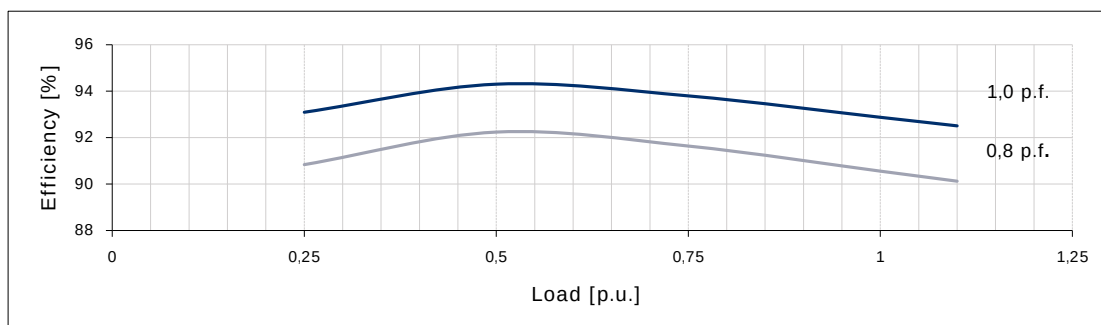

460 V

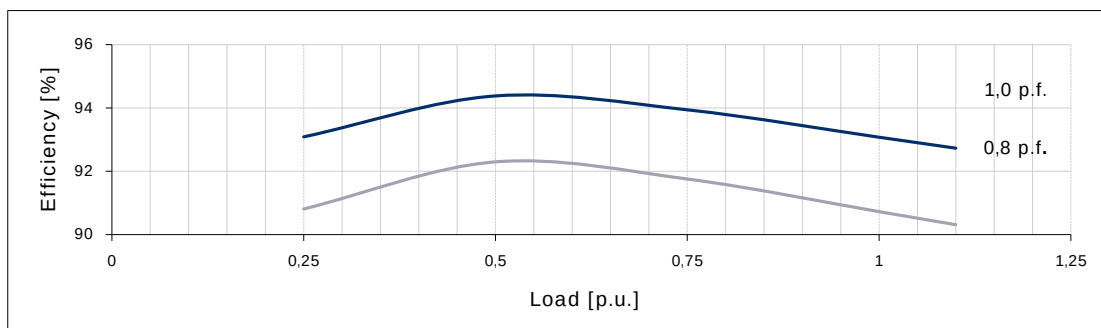

480 V

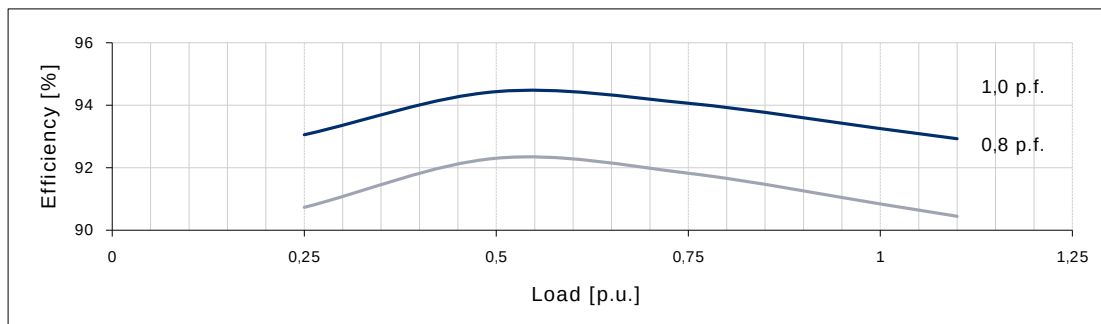


THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 180 LB 4


Typical voltage DIP curves

50 Hz - 1500 min⁻¹


380 V

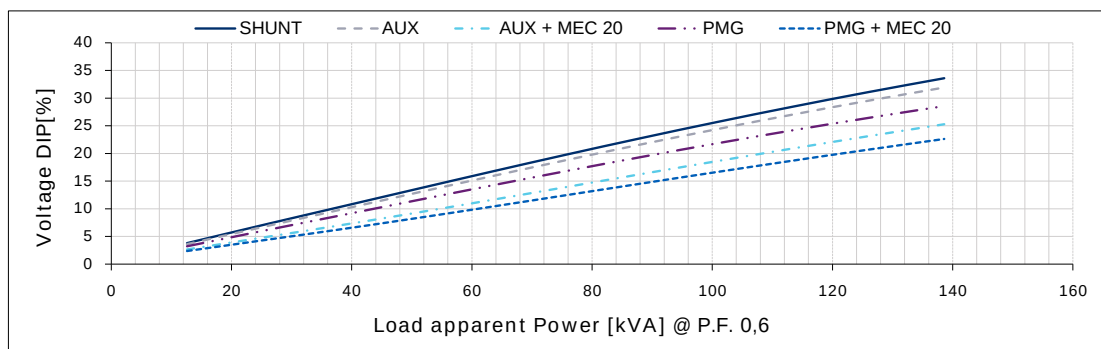


400 V

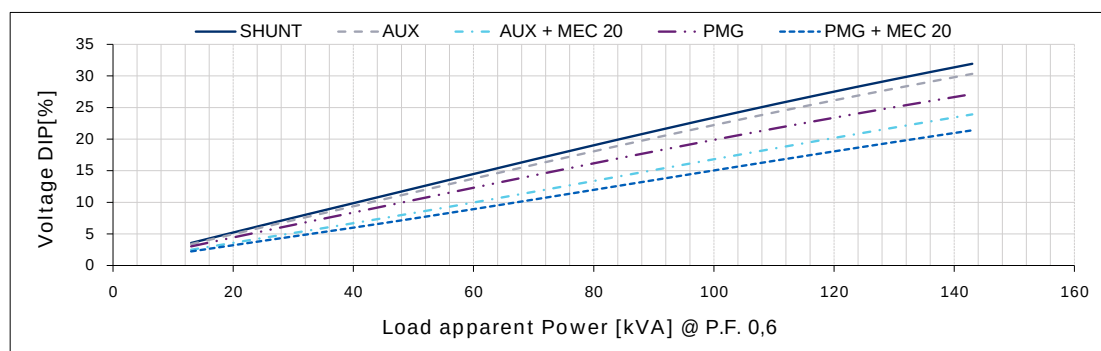

415 V

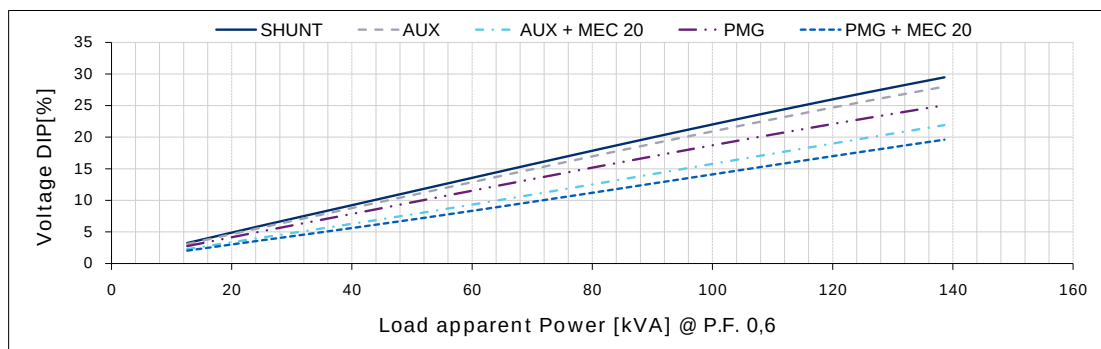


440 V

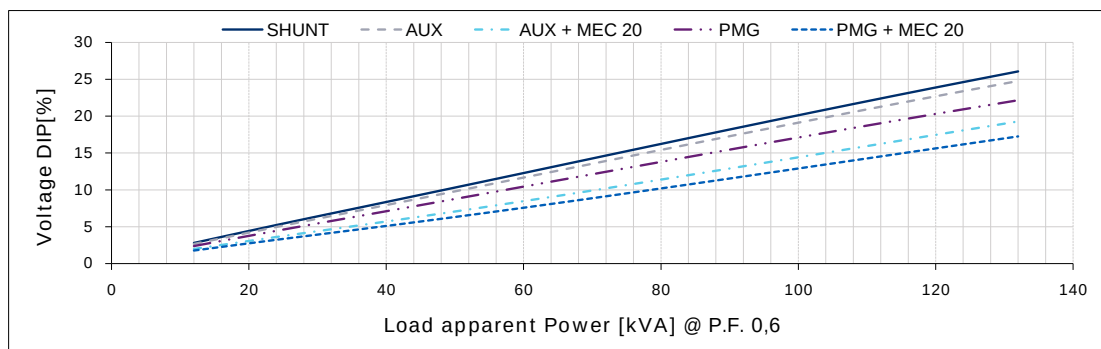


Typical voltage DIP curves

60 Hz - 1800 min⁻¹


380 V

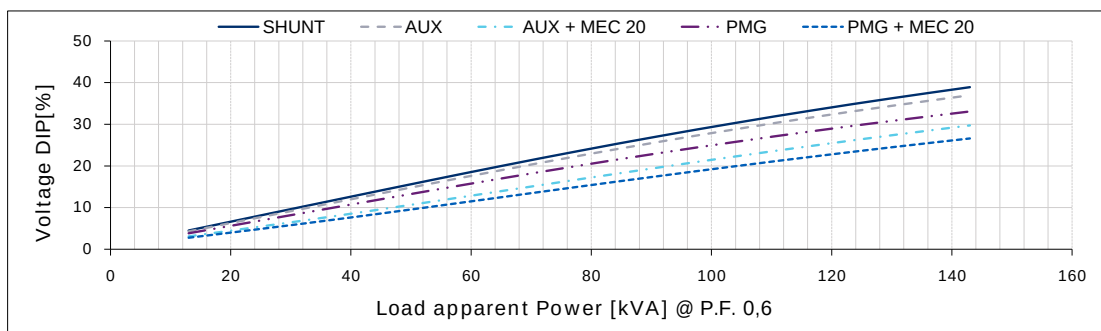


416 V

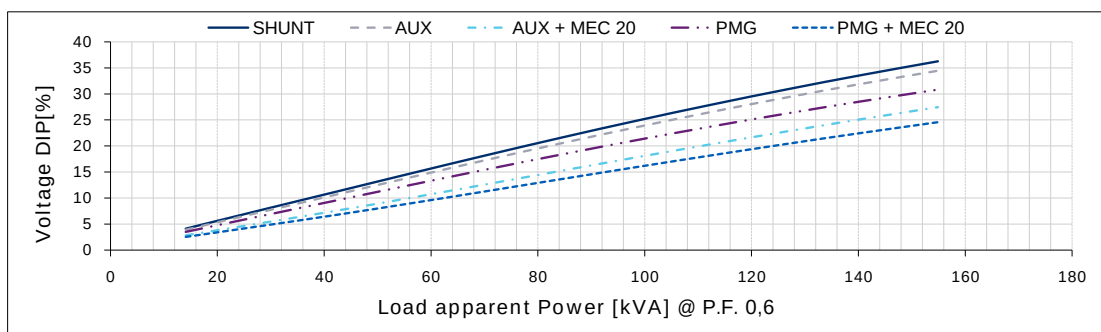


440 V

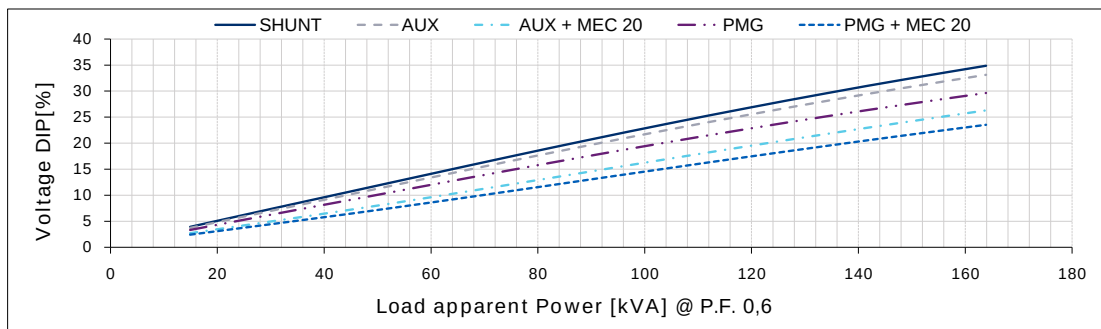

460 V

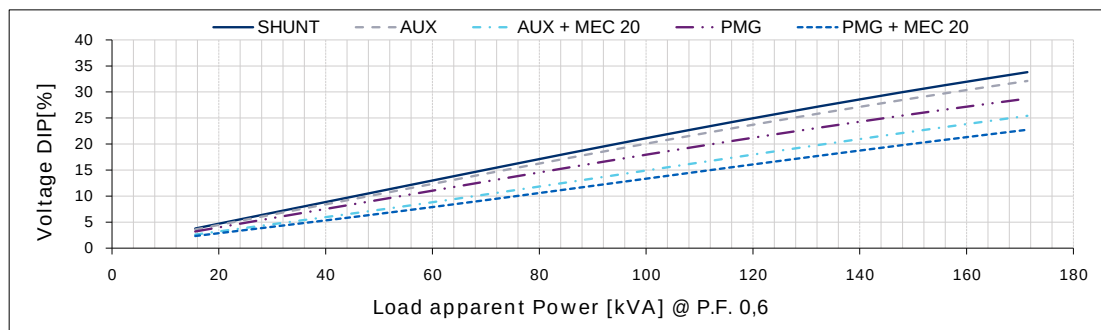

480 V

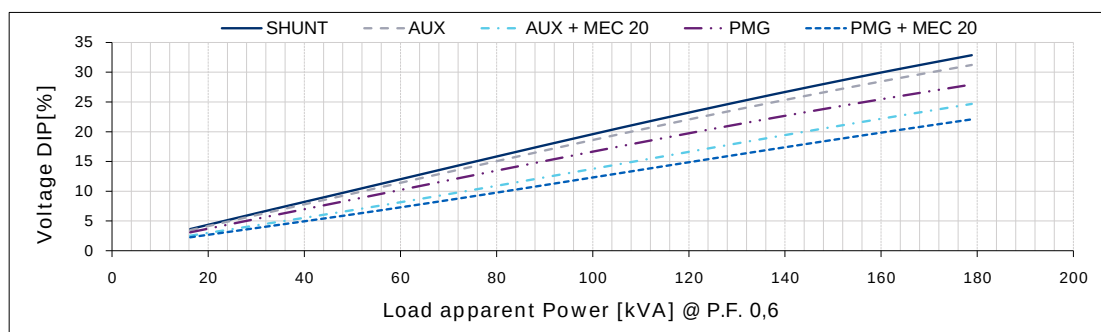


For P.F. different from 0,6 the following simplified formula can be used: $\Delta V \text{ (@ P.F.)} = \Delta V \text{ (@ 0,6)} \cdot \sin(\arccos(P.F.)) / 0,8$

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 180 LB 4


Typical voltage DIP curves

50 Hz - 1500 min⁻¹


380 V

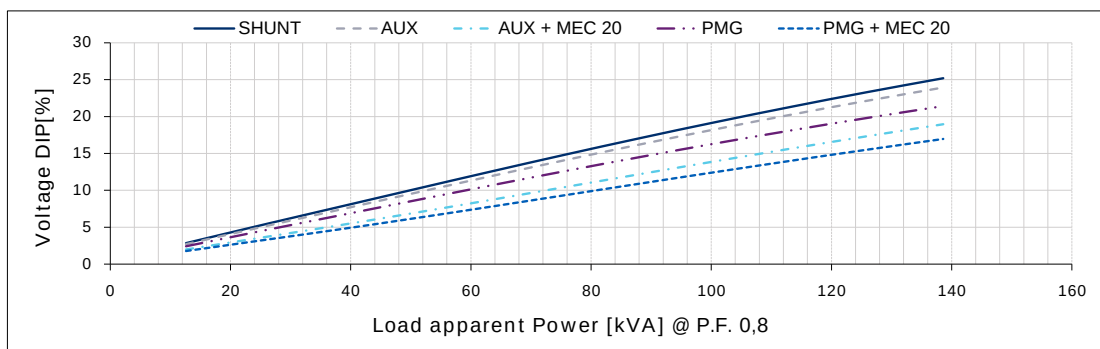


400 V

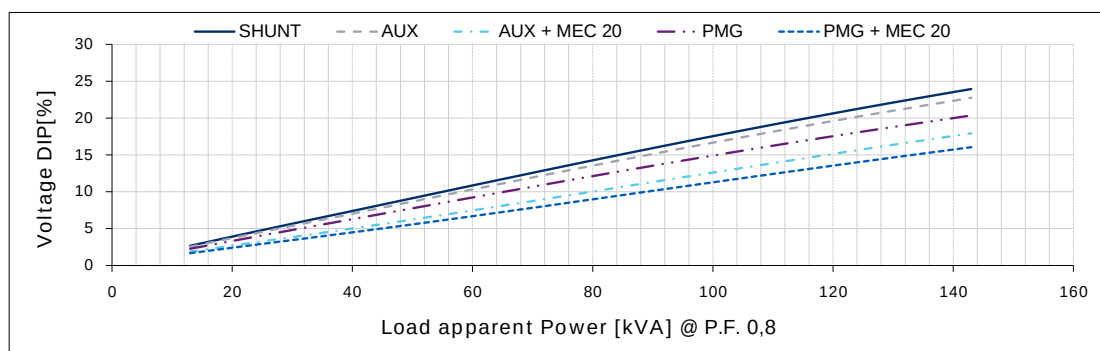

415 V

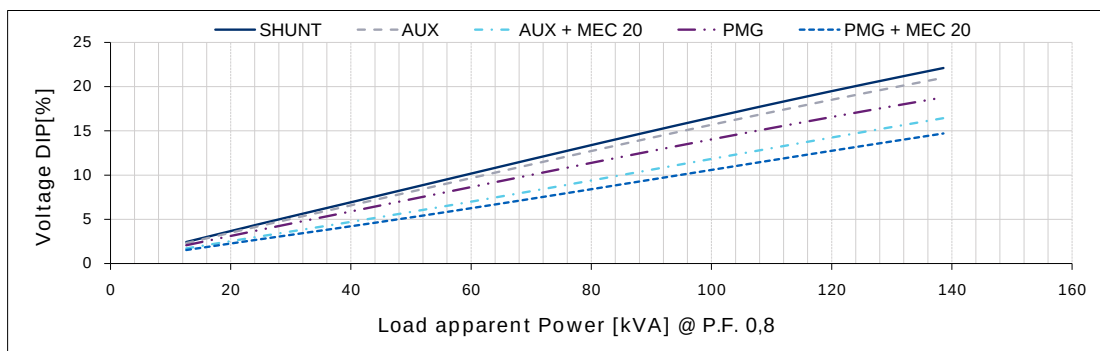


440 V

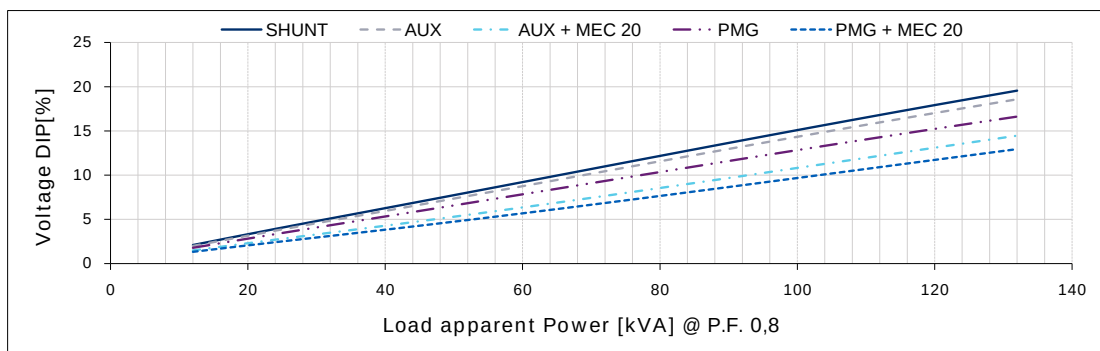


Typical voltage DIP curves

60 Hz - 1800 min⁻¹


380 V

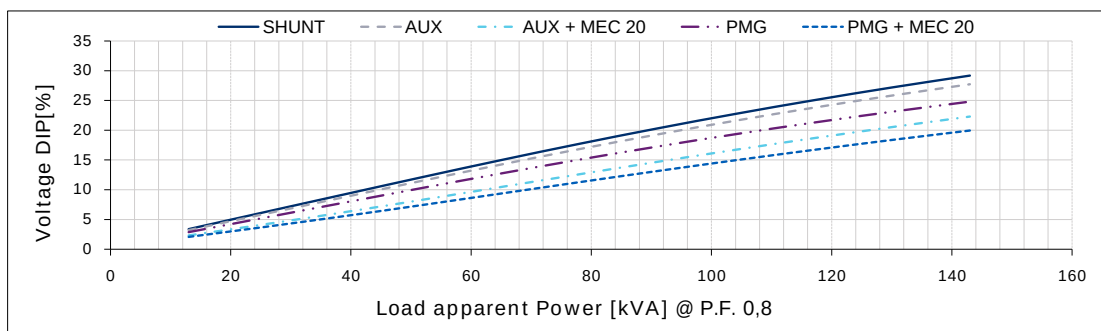


416 V

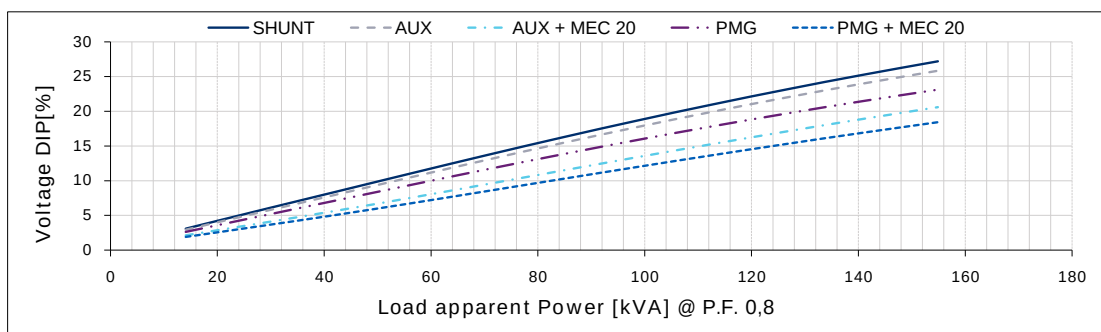


440 V

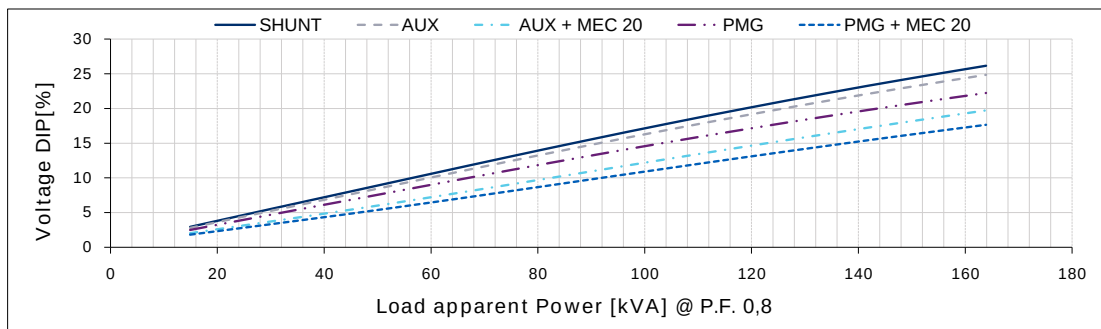

460 V

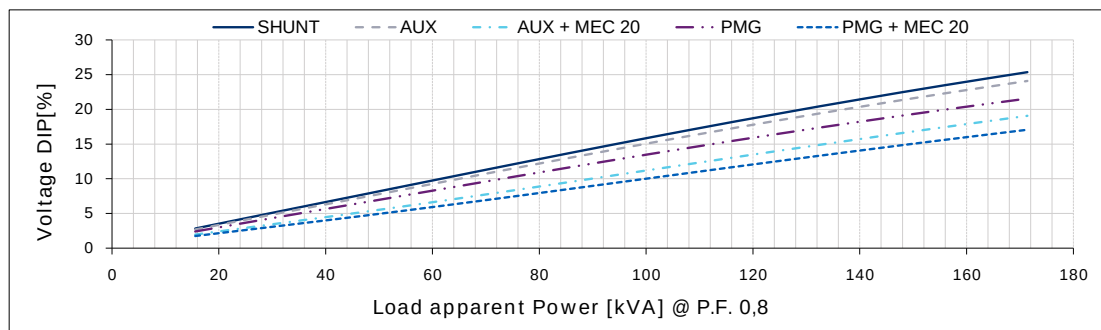


480 V

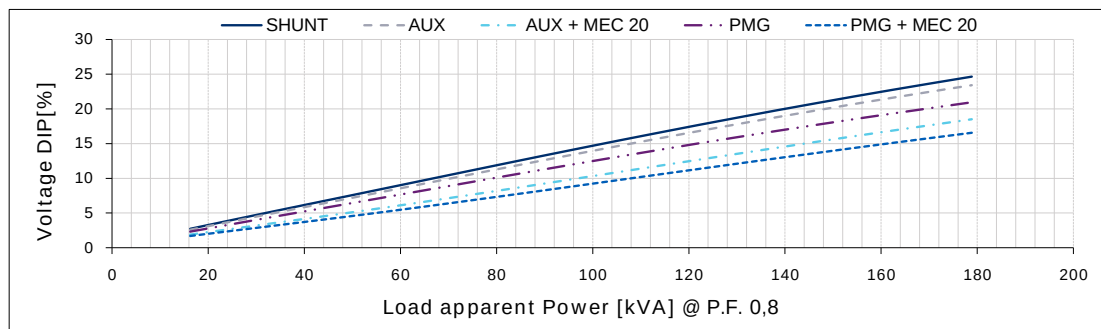


Typical 3-phase short circuit decrement curves

50 Hz - 1500 min⁻¹


380 V

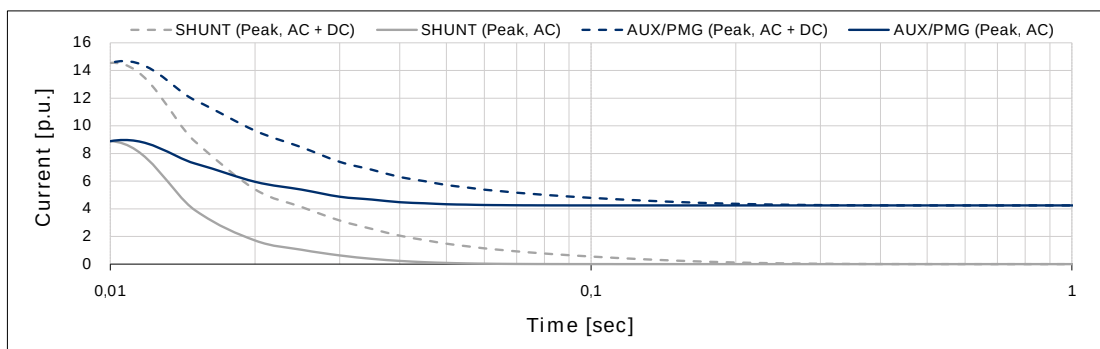


400 V

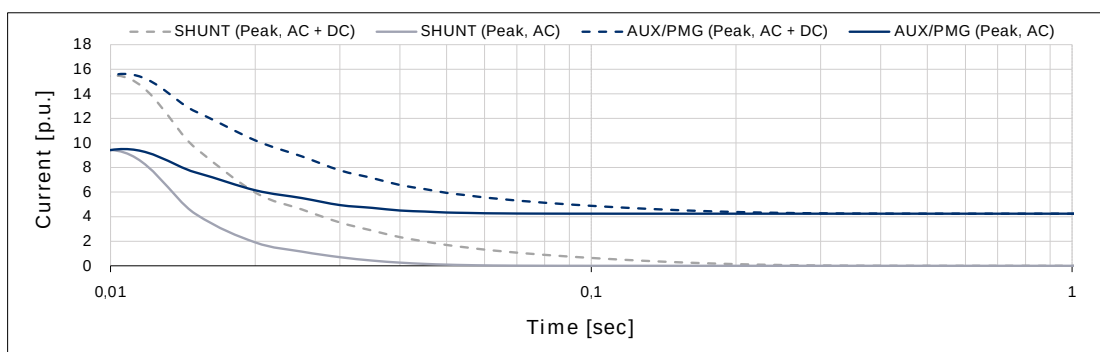

415 V

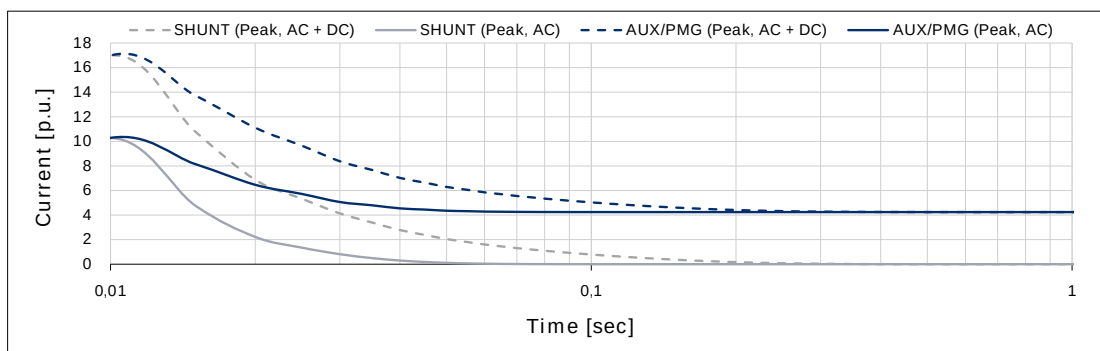


440 V

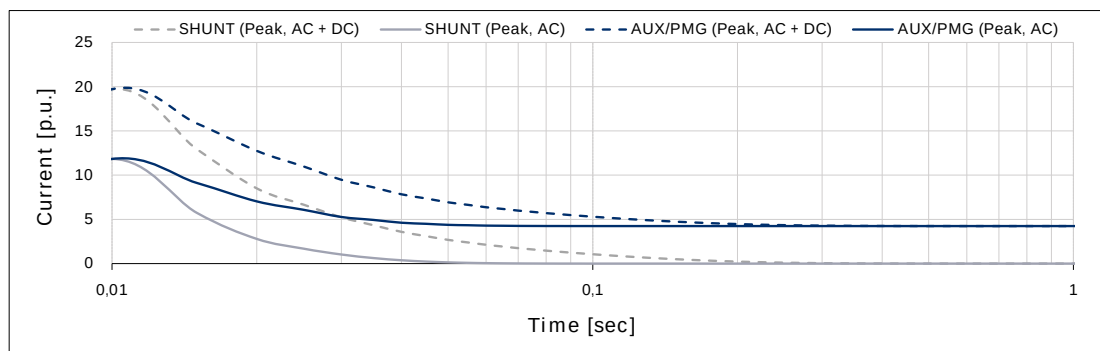


Typical 3-phase short circuit decrement curves

60 Hz - 1800 min⁻¹


380 V

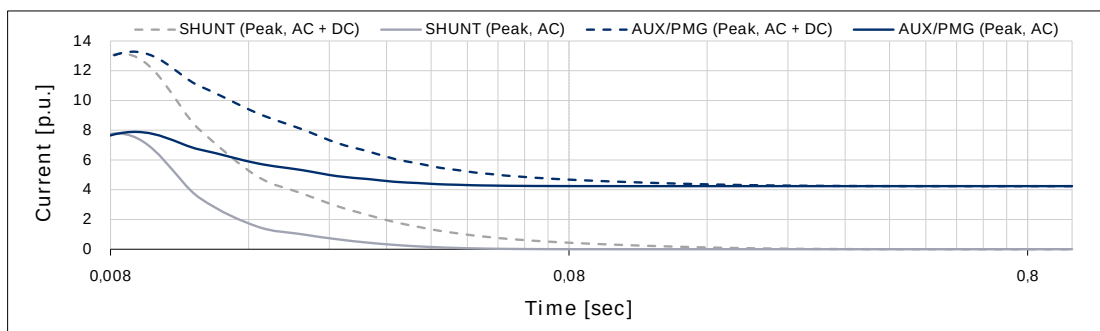


416 V

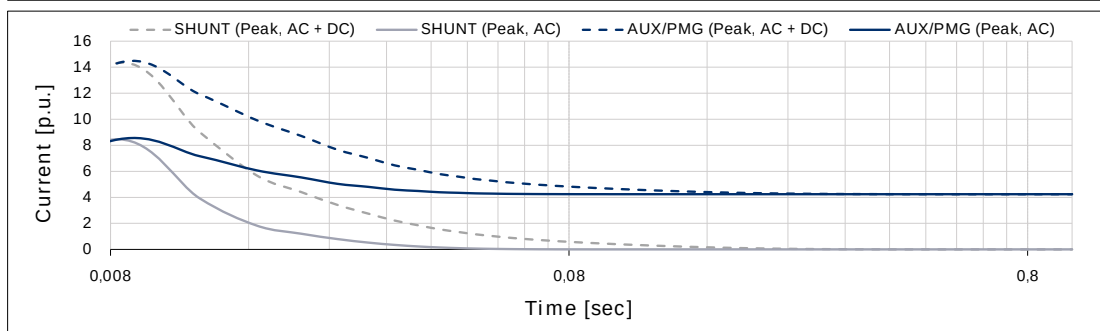


440 V

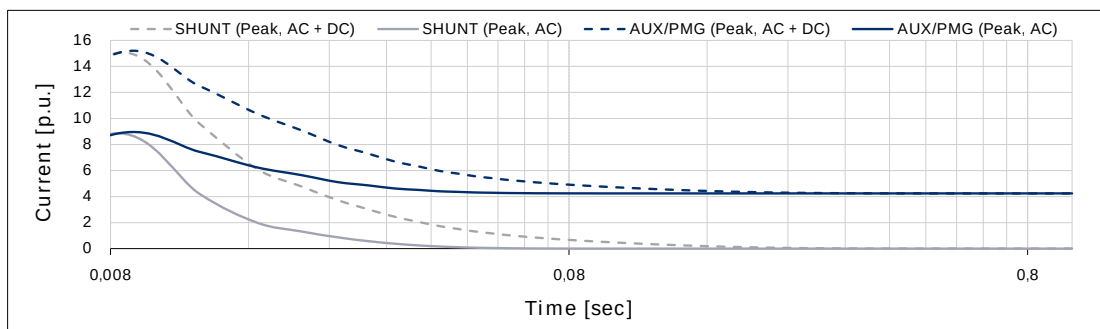

460 V

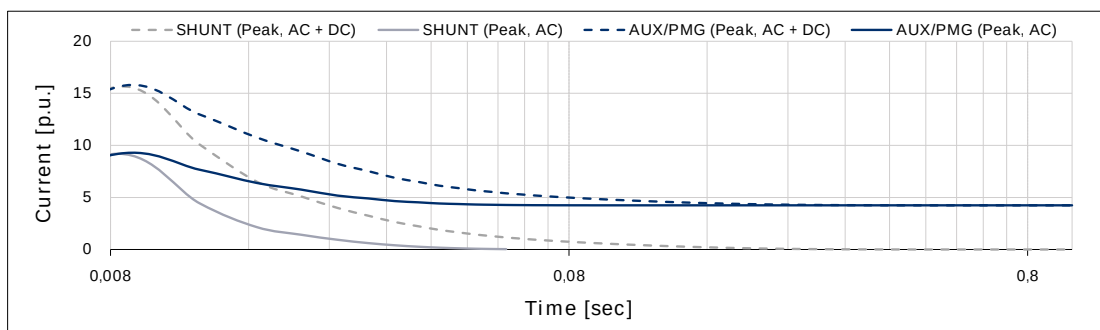

480 V

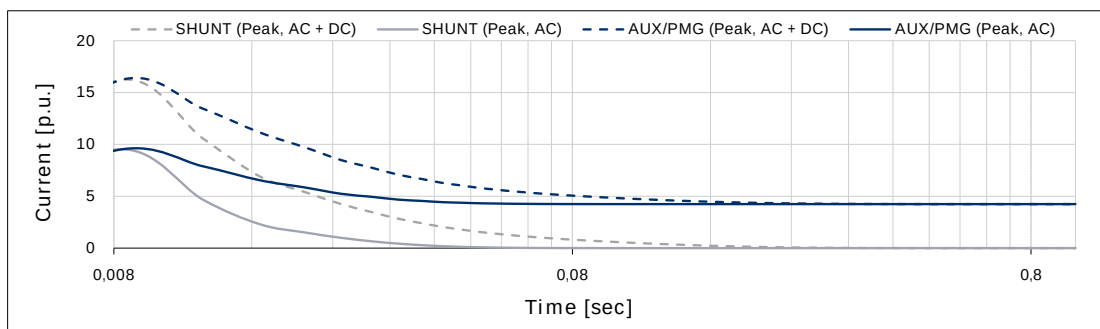


Above curves are based on a three-phase short circuit
For other type of short circuit use the following multiplication factors

	2 phase	1 phase
Instantaneous (max)	0,93	1,13
Continuous	1,50	1,83


SYN.DS.0061_ =

Typical load rejection curves

50 Hz - 1500 min-1

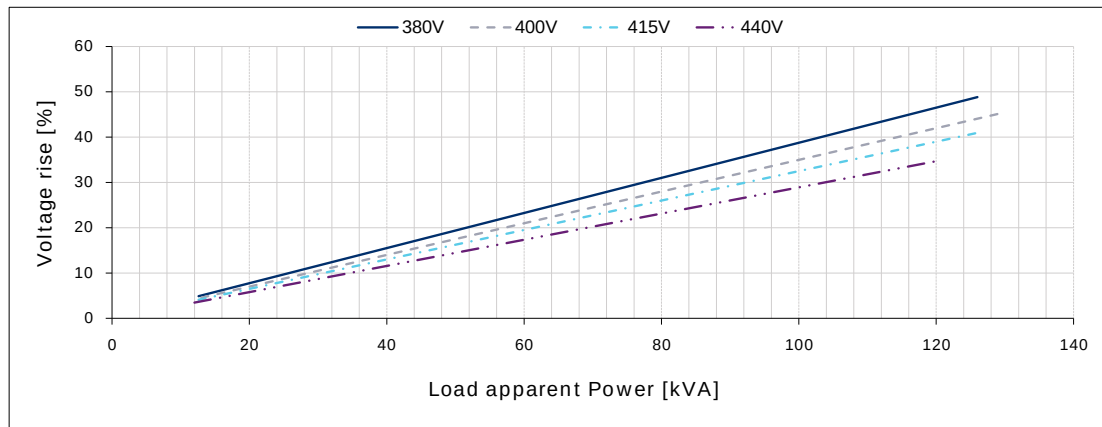

60 Hz - 1800 min-1

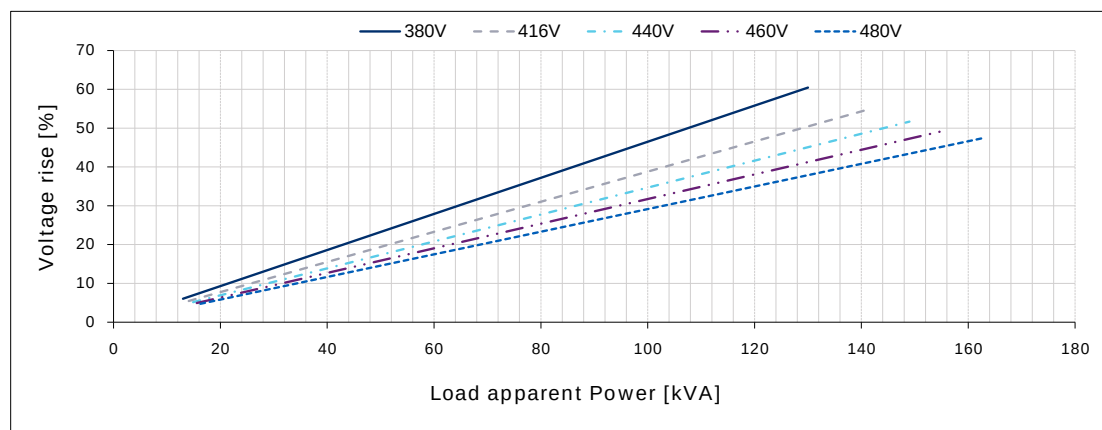

This document is the property of Marelli Motori S.p.A. No part of this document may be copied or reproduced in any way.

The attached information should be considered a guideline for commercial discussion and could be subject to review. Marelli Motori reserves the right to make changes in the data without notice.

SYN.DS.0061_ =