

THREE-PHASE SYNCHRONOUS GENERATOR

MXB-E 180 SC 4

4 POLES

CONTINUOUS DUTY

50 Hz-1500 min⁻¹ / 60 Hz-1800 min⁻¹

AMBIENT TEMPERATURE TEMPERATURE RISE INSULATION CLASS POWER FACTOR	40°C H H 0,8	WINDING DATA									
		Winding code Number of leads Winding pitch									
FREQUENCY	Hz	50					60				
VOLTAGE	Star series	380	400	415	440	380	416	440	460	480	
	Star parallel	190	200	208	220	190	208	220	230	240	
RATING	kVA	38,0	40,0	38,6	36,0	40,0	43,3	45,8	47,9	50,0	
	kW	30,4	32,0	30,9	28,8	32,0	34,6	36,6	38,3	40,0	
EFFICIENCY (%) @ 0,8 p.f.	4/4	87,8	88,0	88,4	88,8	87,6	88,4	88,7	89,0	89,2	
	3/4	89,5	89,6	89,8	89,8	89,4	89,9	90,2	90,4	90,5	
	2/4	90,8	90,8	90,7	90,3	90,7	91,0	91,2	91,3	91,4	
EFFICIENCY (%) @ 1,0 p.f.	4/4	91,0	91,4	91,9	92,5	90,6	91,3	91,6	91,9	92,2	
	3/4	92,5	92,8	93,0	93,3	92,1	92,6	92,9	93,1	93,3	
	2/4	93,6	93,7	93,7	93,5	93,3	93,6	93,8	93,9	94,0	
STAND-BY RATING (163/27)	kVA	41,8	44,0	42,5	39,6	44,0	47,6	50,4	52,7	55,0	
STAND-BY EFFICIENCY (%) @ 0,8 p.f.		87,1	87,4	87,9	88,3	86,9	87,7	88,2	88,4	88,6	
SHORT CIRCUIT RATIO (referred to class H rating)		0,36	0,37	0,42	0,50	0,28	0,31	0,33	0,34	0,36	
REACTANCES (%) (referred to class H rating)											
Direct axis synchronous	x _d	310	294	264	219	391	354	334	320	307	
Quadrature axis synchronous	x _q	141	134	120	99	178	161	152	145	139	
Direct axis transient	x' _d	16,1	15,3	13,7	11,4	20,4	18,4	17,4	16,7	16,0	
Direct axis subtransient	x'' _d	12,0	11,4	10,3	8,5	15,2	13,7	13,0	12,4	11,9	
Quadrature axis subtransient	x'' _q	14,7	14,0	12,5	10,4	18,6	16,8	15,9	15,2	14,6	
Negative sequence	x ₂	14,0	13,3	12,0	9,9	17,7	16,0	15,1	14,5	13,9	
Zero sequence	x ₀	10,5	10,0	9,0	7,4	13,3	12,0	11,4	10,9	10,4	

TIME CONSTANTS [s]

Open circuit (T' _{do})	0,614	Subtransient (T'' _d)	0,010
Transient (T' _d)	0,061	Armature (T _a)	0,011

MECHANICAL CHARACTERISTICS

D-end bearing/Lubrication	Available on double bearing configuration (on request)
N-end bearing/Lubrication	6207 2RS C3 / Prelubricated
Weight [kg]	156
Inertia (J) [kgm ²]	0,26
Overspeed [min ⁻¹]	2250
Method of cooling	IC 01
Cooling air required [m ³ /s] @ 50/60 Hz	0,11 / 0,13
Degree of protection	IP 23
Type of construction available	B2 (B34 on request)
Direction of rotation	CW

OTHER DATA

Phase resistance [Ω] @ 20 °C - Star series	0,160
Overloads	10% for 1 hour
3-phase short circuit current	≥ 300% (3 I _n) with aux. winding or PMG
Voltage regulation accuracy	+/- 0,5 % (@ rated load, balanced and non-distorting, p.f. 0,8)
Radio interference	EN 55011 Class B Group 1
Wave form THF	< 2%
Total harmonic content	< 2% (at no load)

STANDARDS


IEC 60034-1; BS 4999-5000; NEMA MG 1.32.
--

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 180 SC 4


Typical efficiency curves

50 Hz - 1500 min⁻¹


380 V

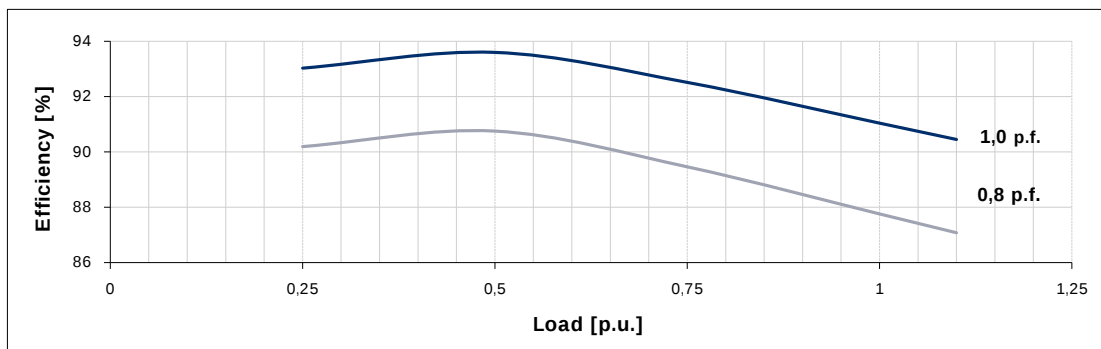


400 V

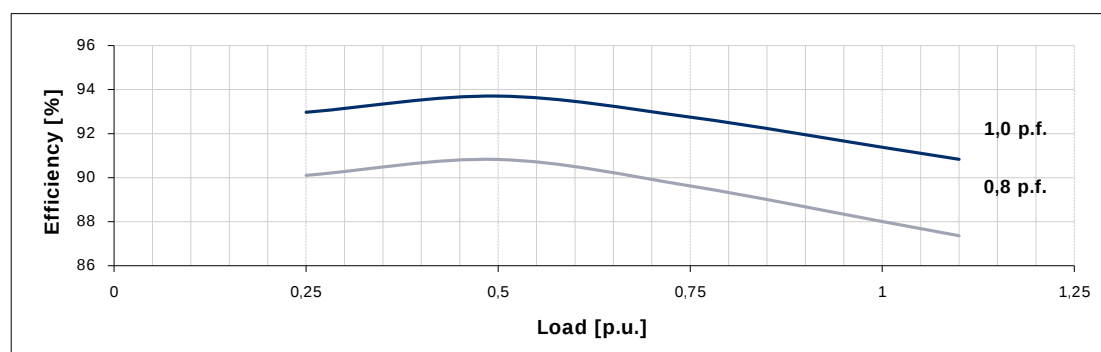

415 V

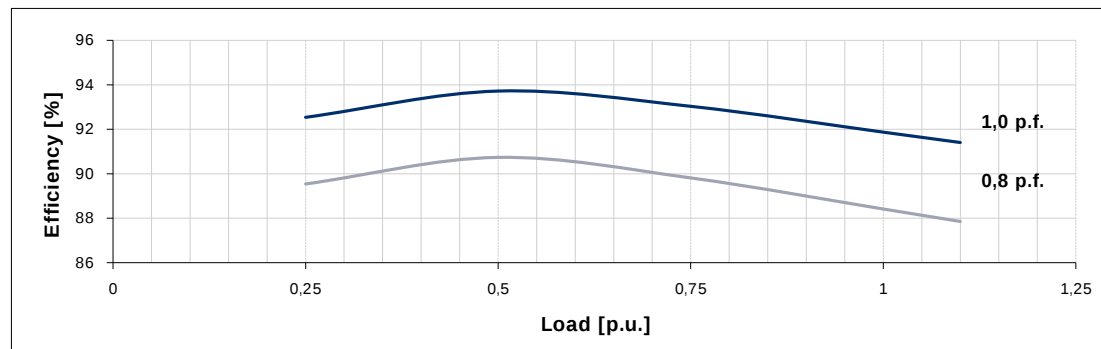


440 V

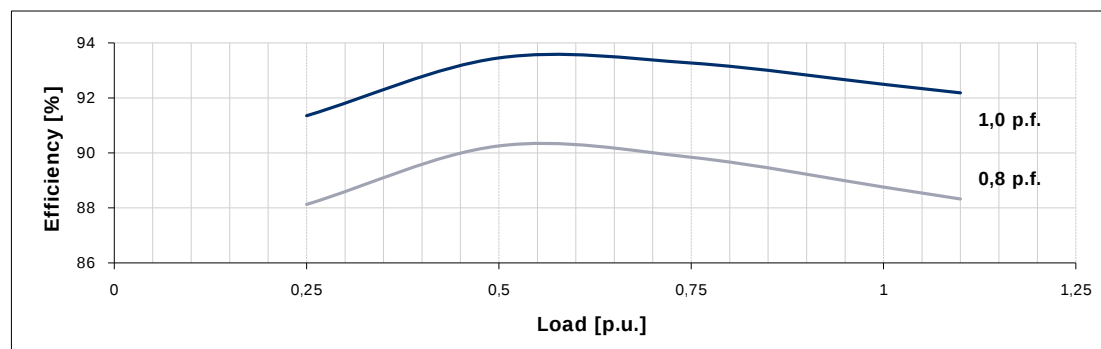


Typical efficiency curves

60 Hz - 1800 min⁻¹


380 V

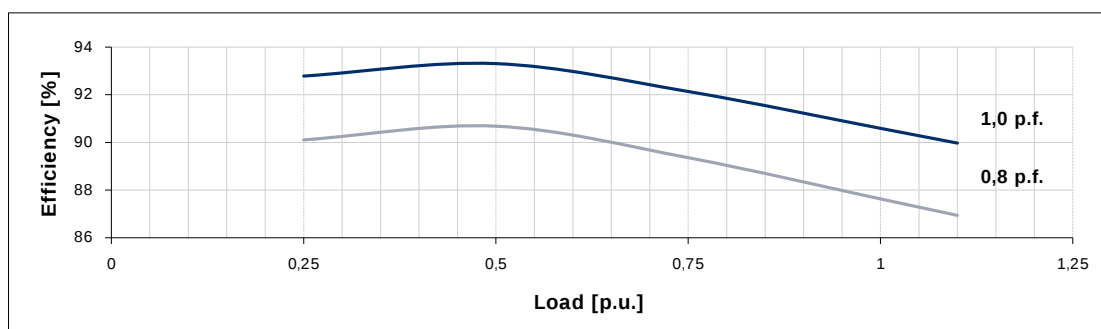


416 V

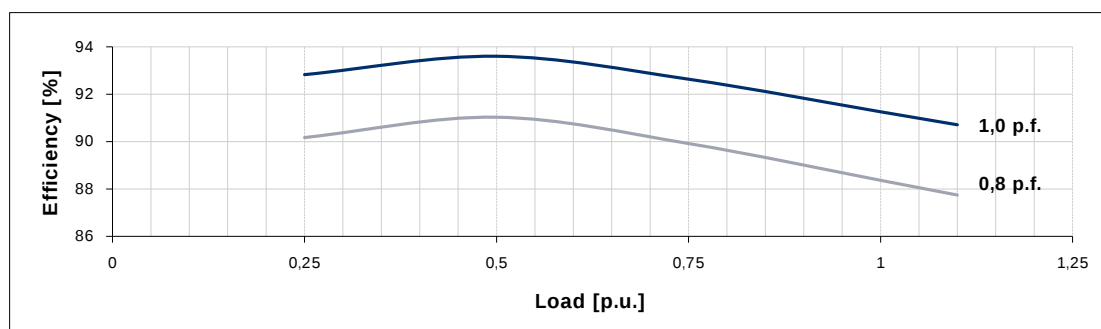


440 V

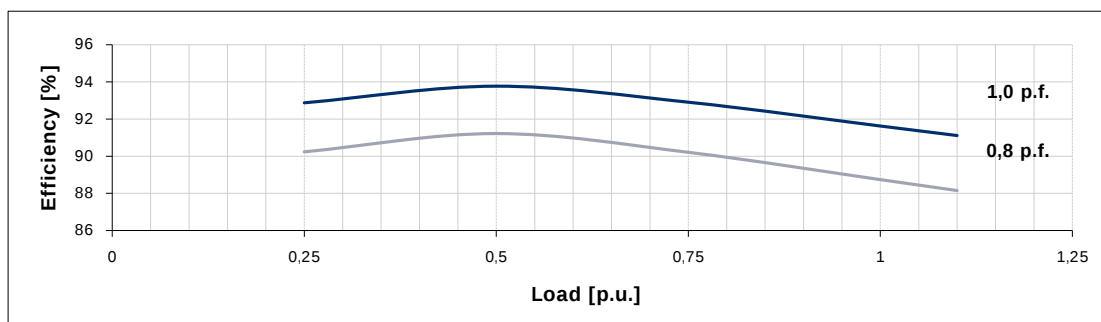

460 V

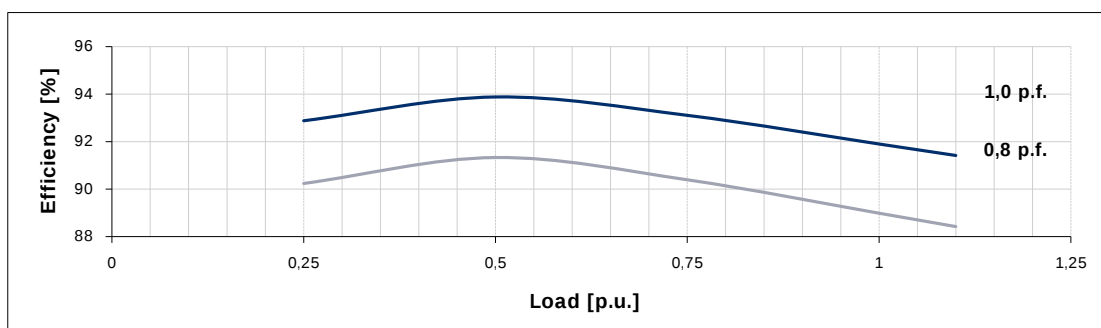

480 V

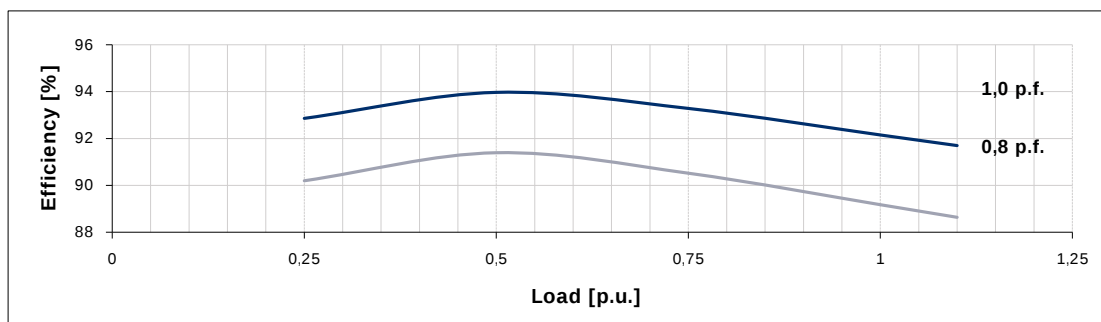


THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 180 SC 4


Typical voltage DIP curves

50 Hz - 1500 min⁻¹


380 V

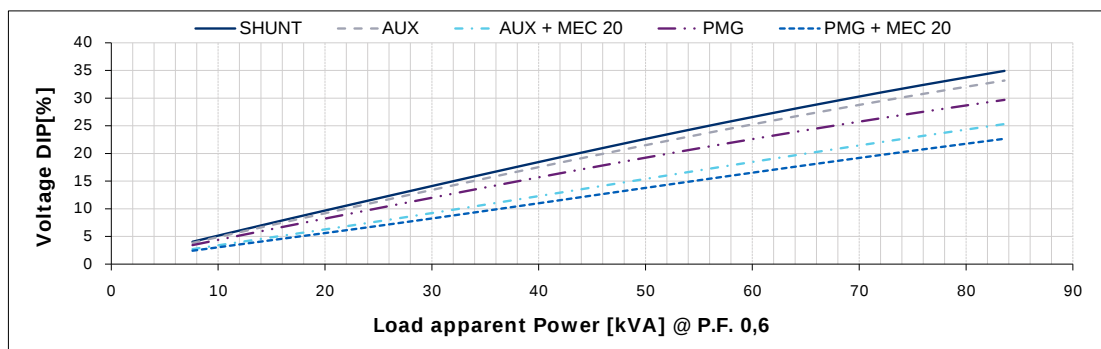


400 V

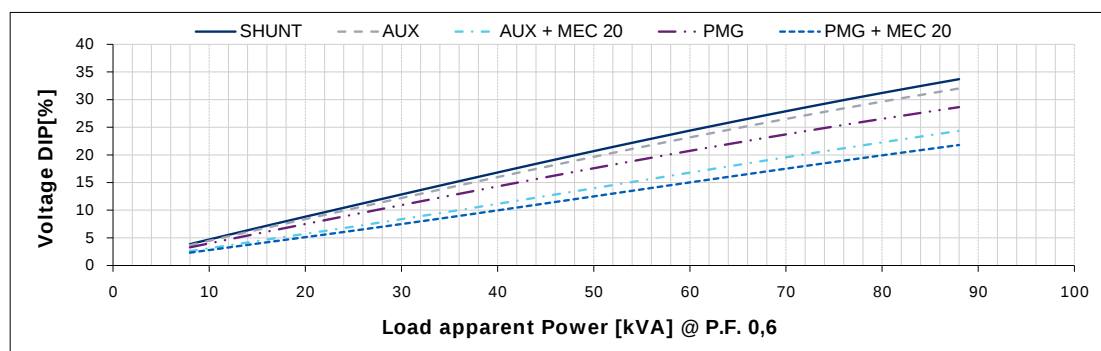

415 V

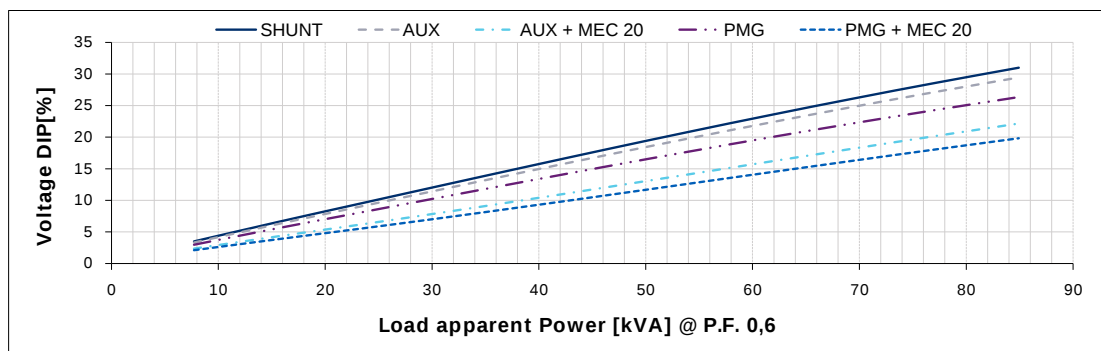

440 V

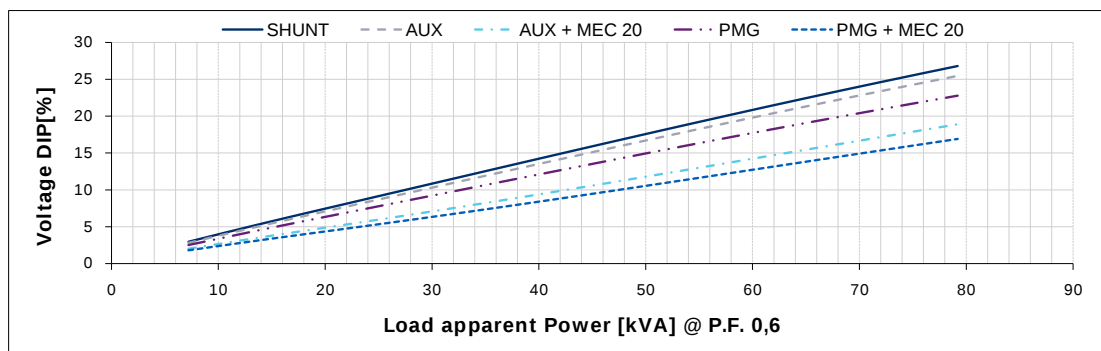


THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 180 SC 4


Typical voltage DIP curves

60 Hz - 1800 min⁻¹


380 V

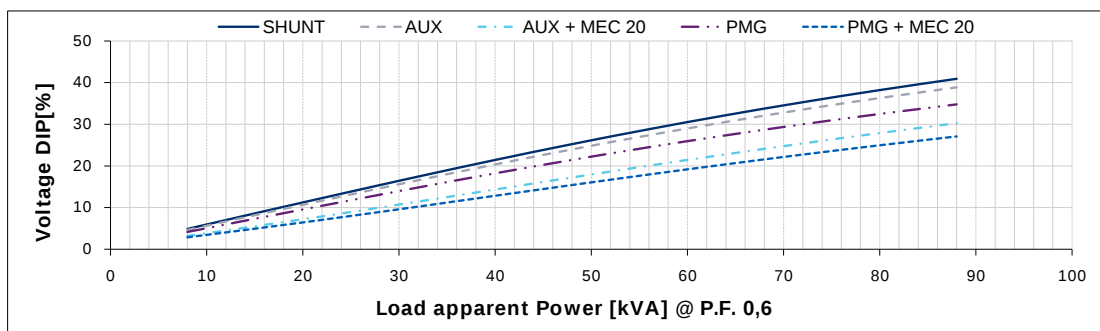


416 V

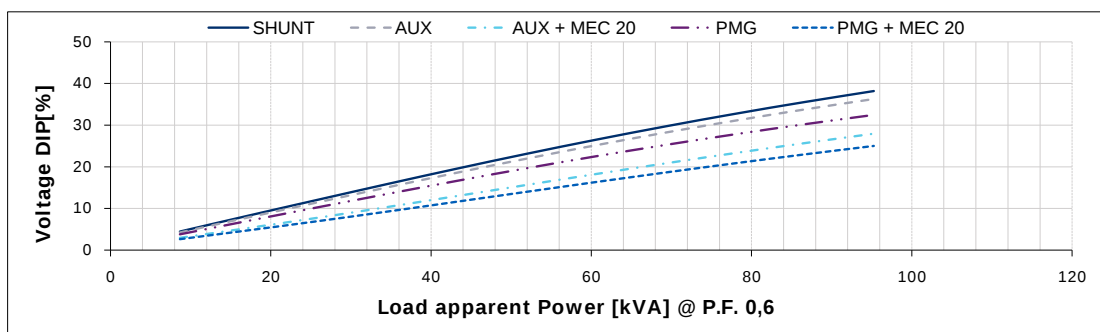


440 V

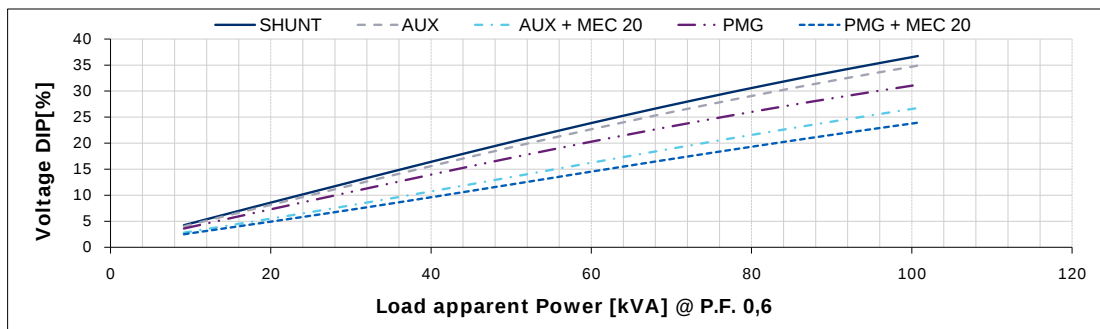

460 V

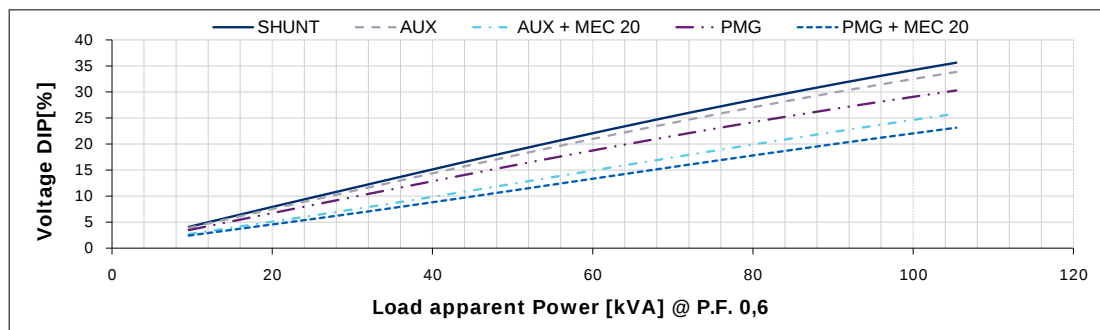

480 V

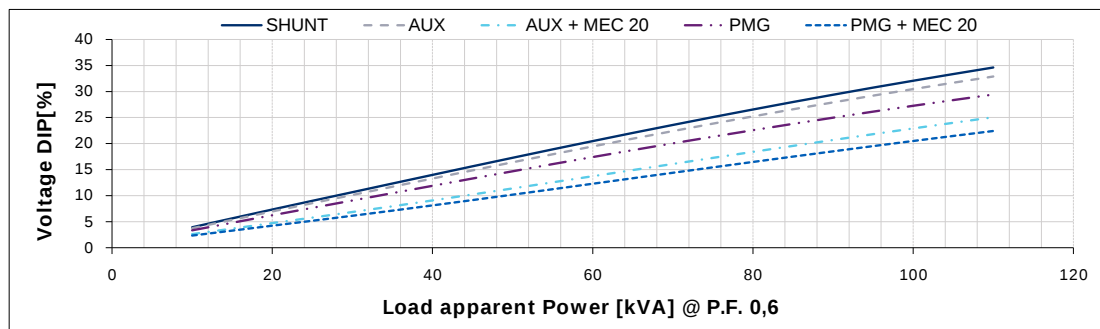


For P.F. different from 0,6 the following simplified formula can be used: $\Delta V (@ P.F.) = \Delta V (@ 0,6) \cdot \sin(\arccos(P.F.)) / 0,8$

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 180 SC 4


Typical voltage DIP curves

50 Hz - 1500 min⁻¹


380 V

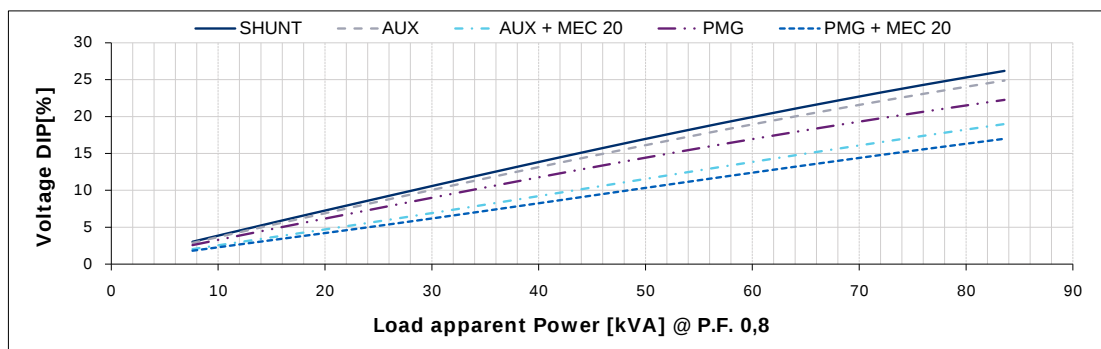


400 V

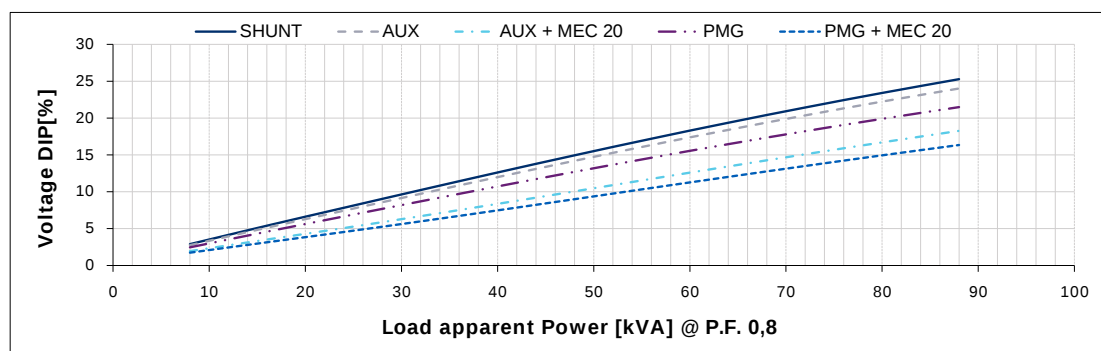

415 V

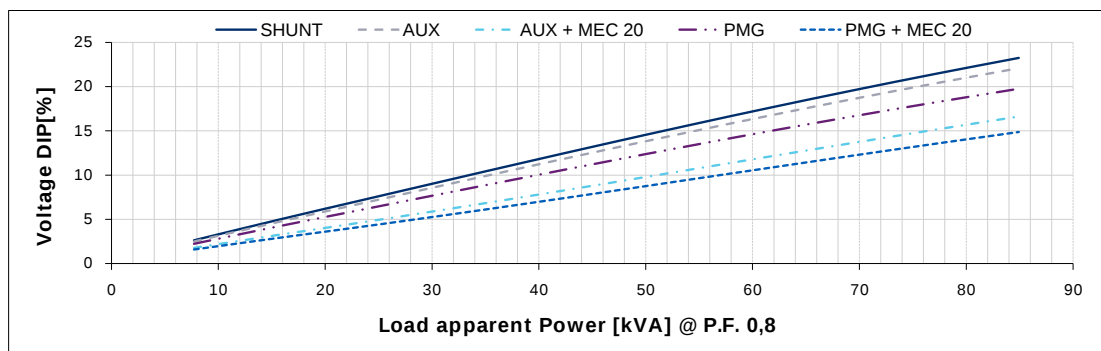

440 V

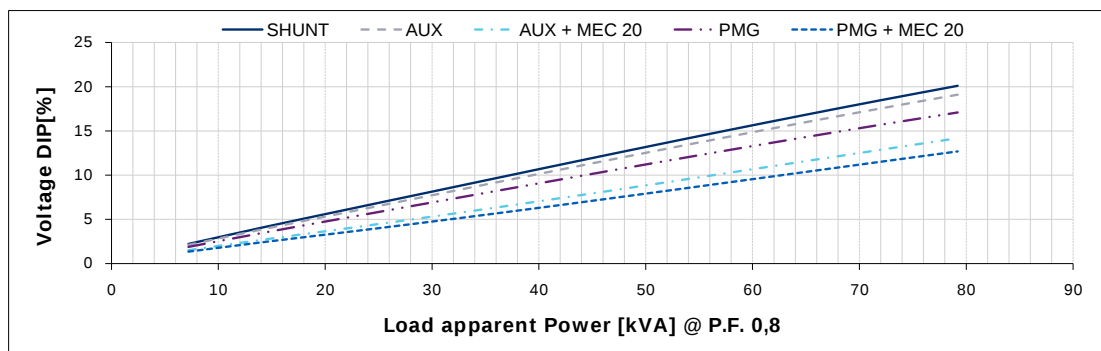


THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 180 SC 4


Typical voltage DIP curves

60 Hz - 1800 min⁻¹


380 V

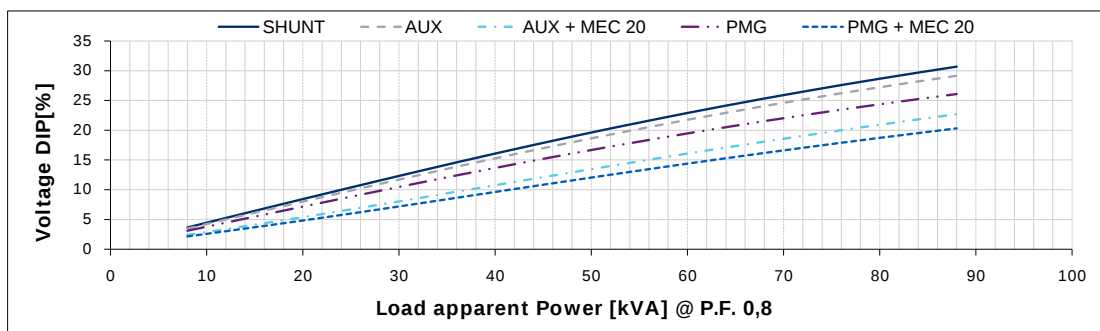


416 V

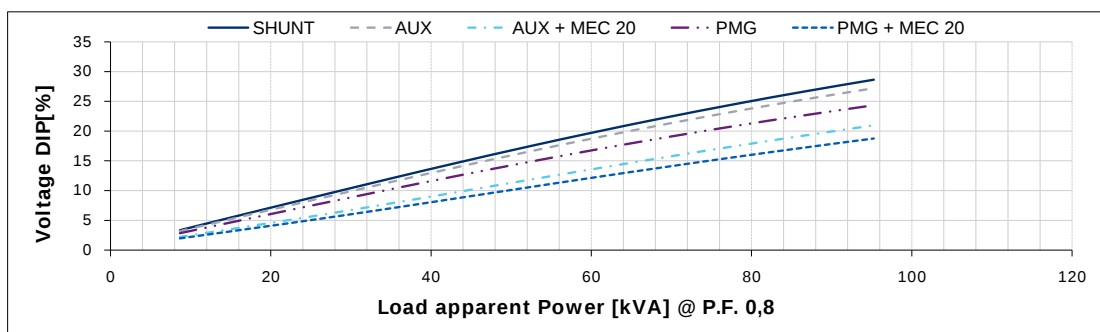


440 V

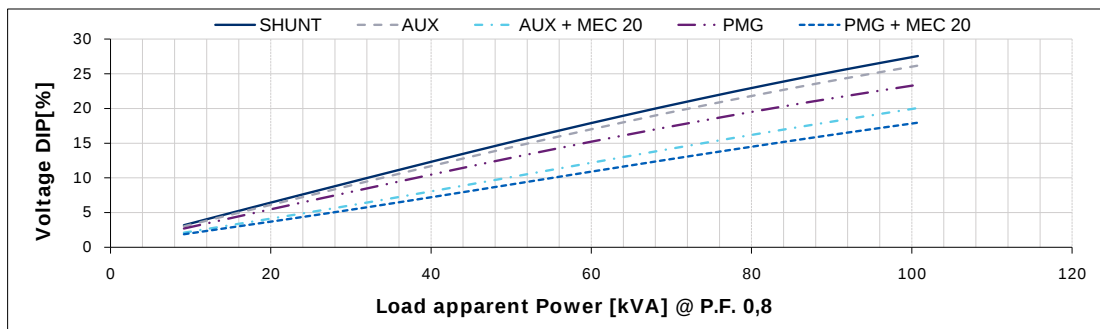

460 V

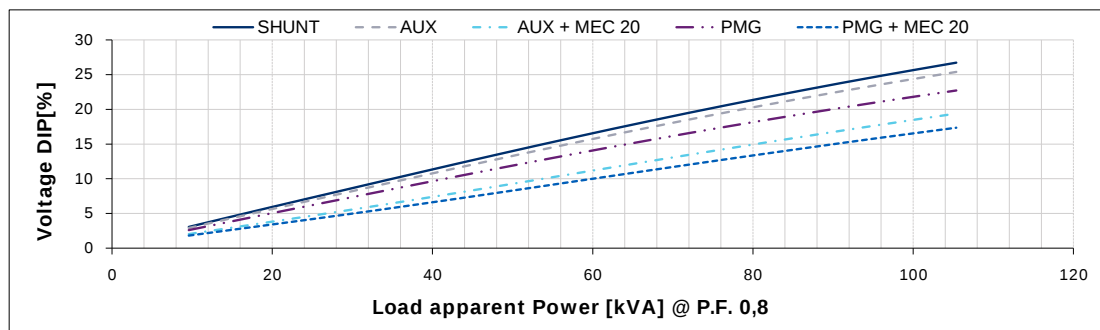


480 V

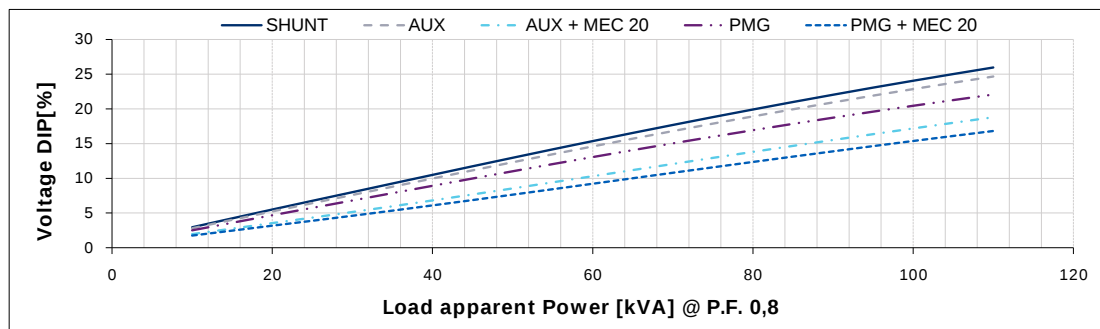


Typical 3-phase short circuit decrement curves

50 Hz - 1500 min⁻¹


380 V

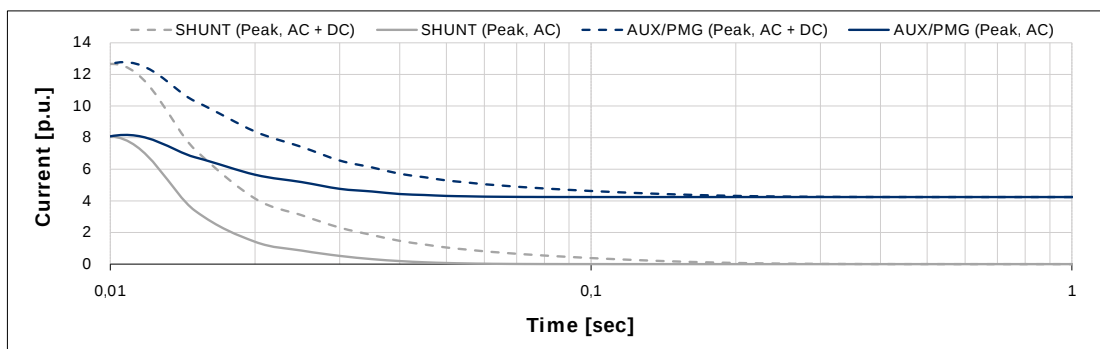


400 V

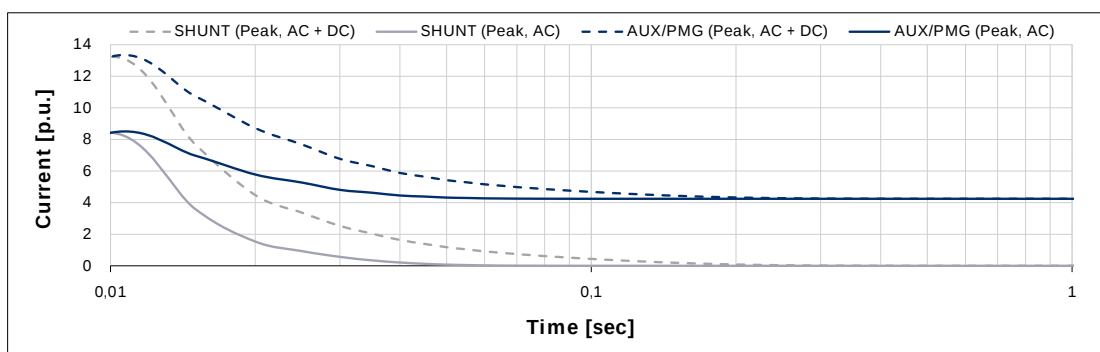

415 V

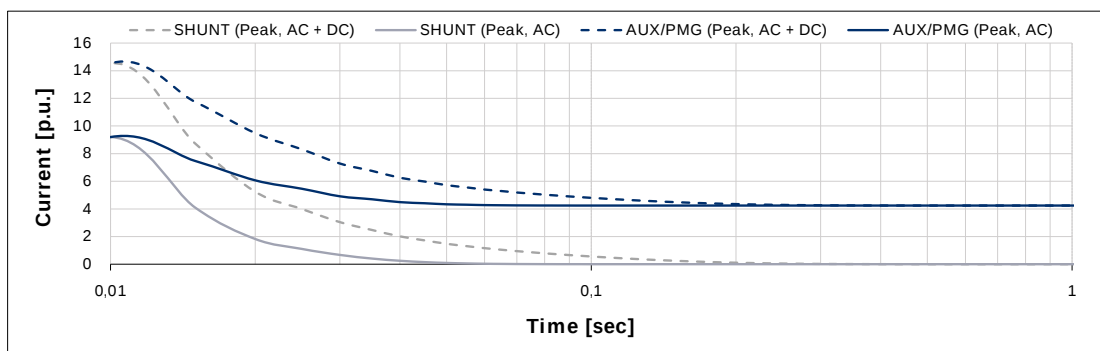


440 V

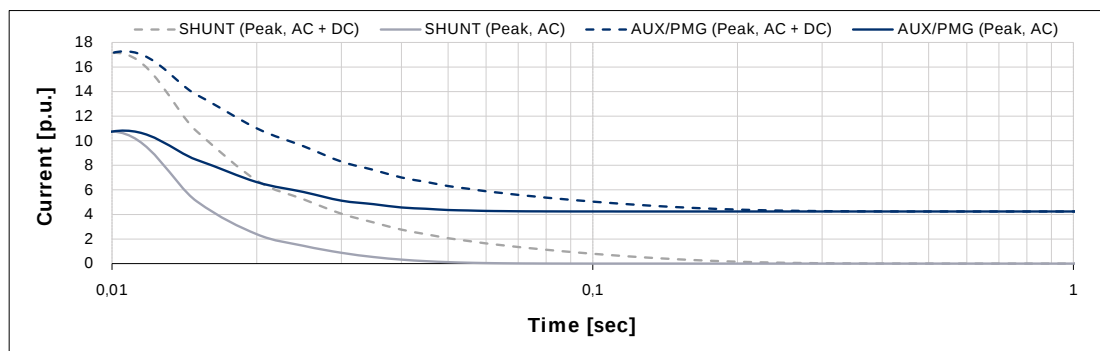


Typical 3-phase short circuit decrement curves

60 Hz - 1800 min⁻¹


380 V

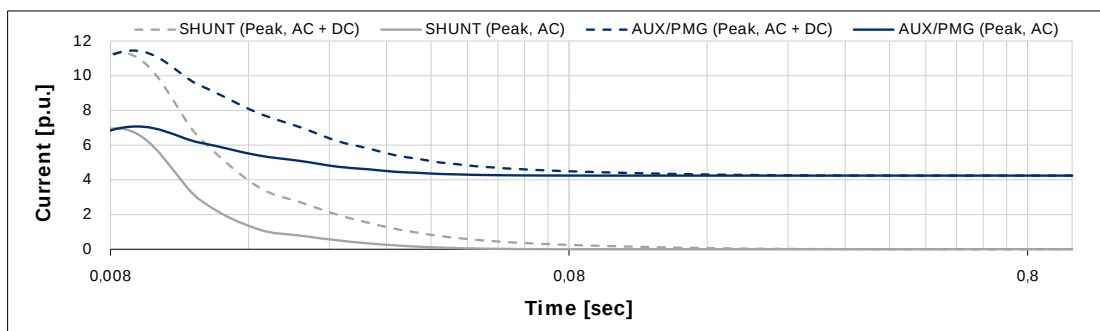


416 V

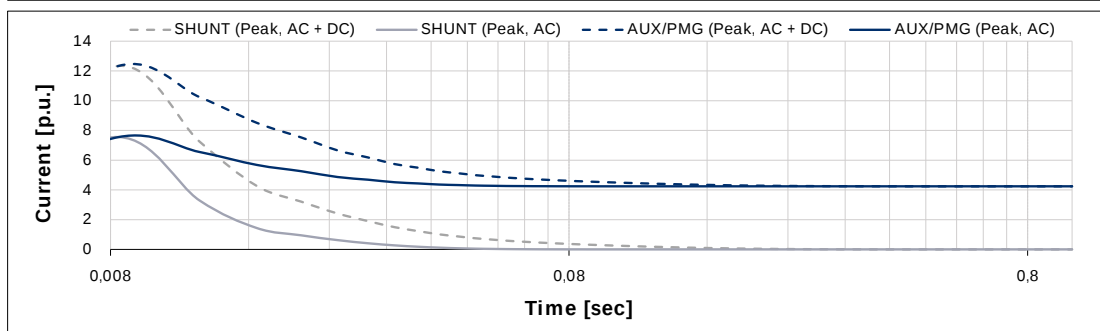


440 V

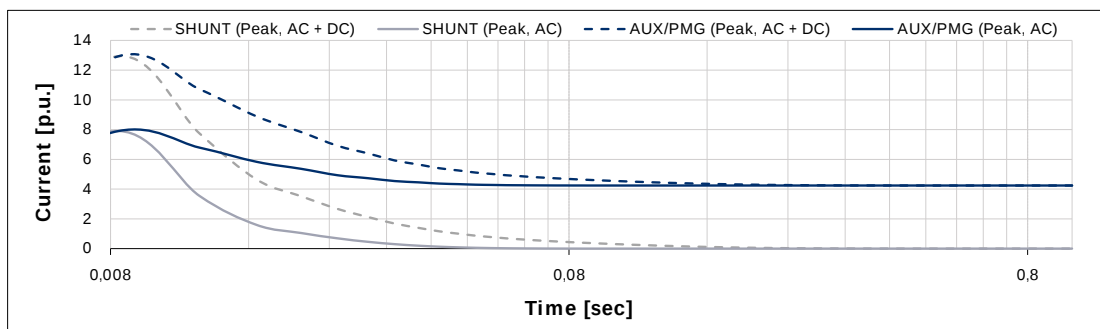

460 V

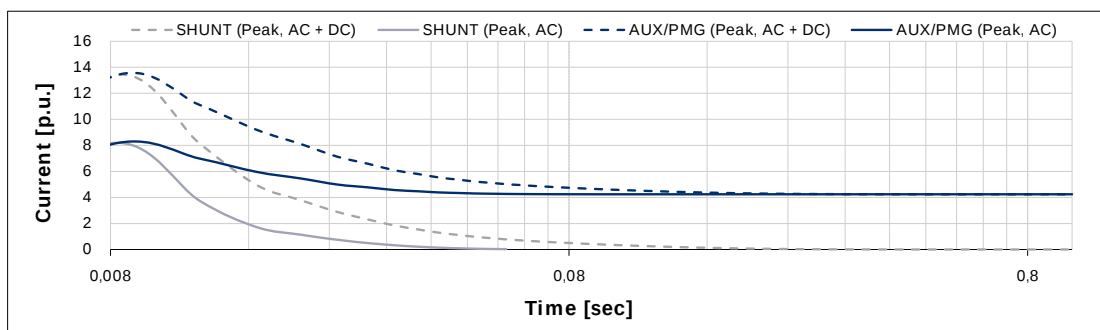

480 V

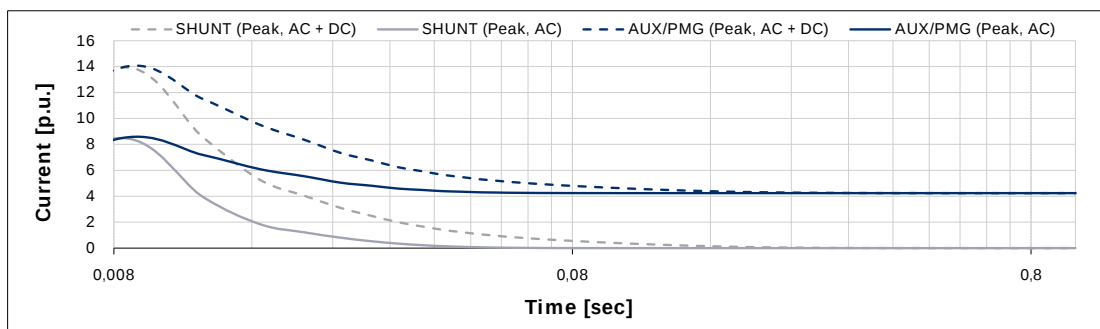


Above curves are based on a three-phase short circuit
For other type of short circuit use the following multiplication factors

	2 phase	1 phase
Instantaneous (max)	0,95	1,14
Continuous	1,50	1,83


SYN.DS.0058_ =

Typical load rejection curves

50 Hz - 1500 min-1

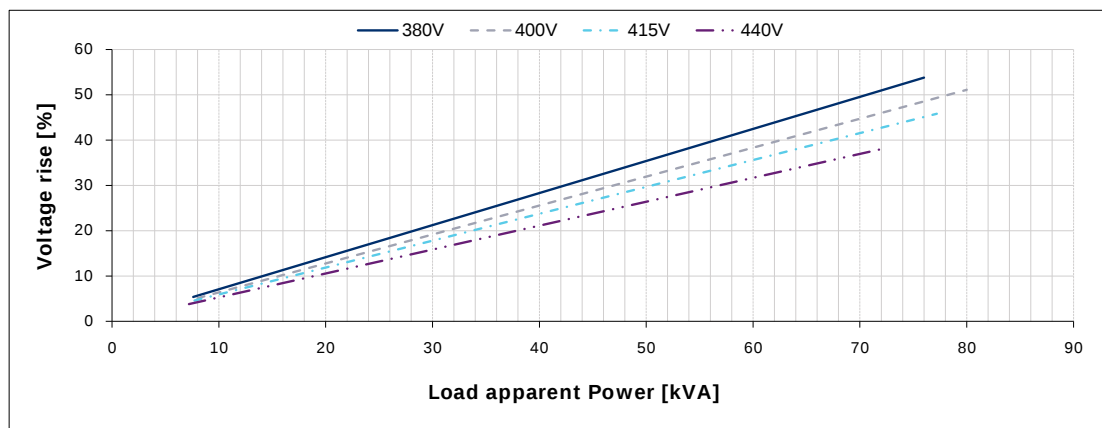

60 Hz - 1800 min-1

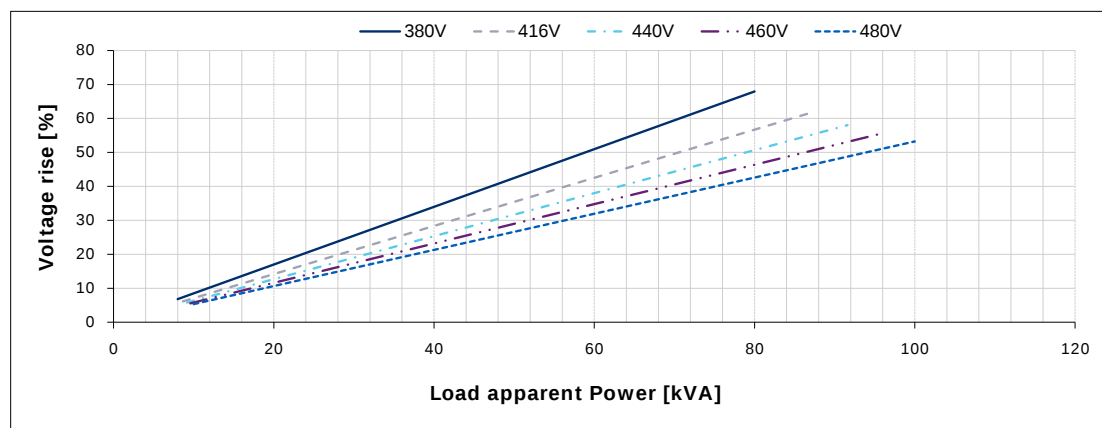

This document is the property of Marelli Motori S.p.A. No part of this document may be copied or reproduced in any way.

The attached information should be considered a guideline for commercial discussion and could be subject to review. Marelli Motori reserves the right to make changes in the data without notice.

SYN.DS.0058_ =